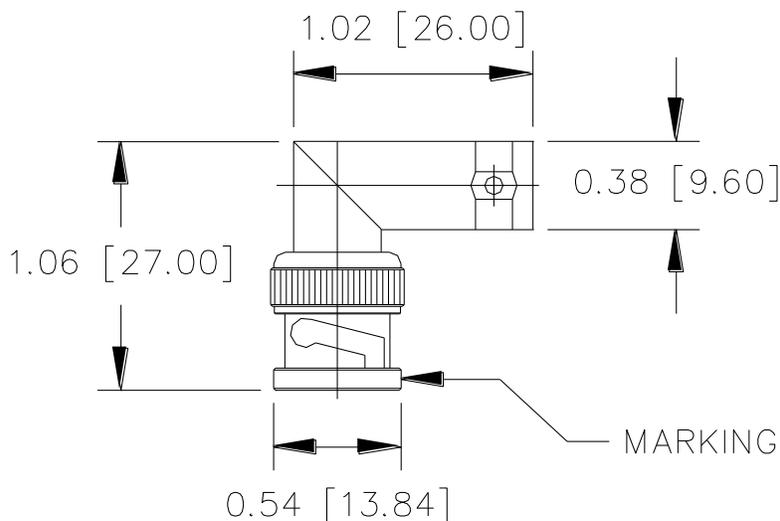


Model 3534
Adapter, BNC (Female to Male), Right-Angle**Features**

- Coupler provides an easy and quick right-angle solution for two lug BNC (M) connectors (orientation of lugs may vary)
- DC – 4GHz bandwidth
- Connectors are precision machined

Materials

Body:	Brass, Tarnish Resistant Plating
Center Contact:	Beryllium Copper, Gold Plated
Outer Contact:	Brass, Gold Plated
Dielectric:	PTFE
Marking (optional):	“Pomona 3534”

Ratings

Voltage: For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vac / 60 Vdc. Maximum voltage for *hands free* use in controlled testing environments: 500 Vrms Max. Do not use on circuits where transient stresses can exceed the rated voltage.

Operating Temperature: -65°C to +165°C

Nominal Impedance: 50 Ohms

Ordering Information

Model: 3534

USA: Technical Support: technicalsupport@pomonatest.com

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.