


Model 5936
Do-It-Yourself 2mm Banana Plug, Solder Type

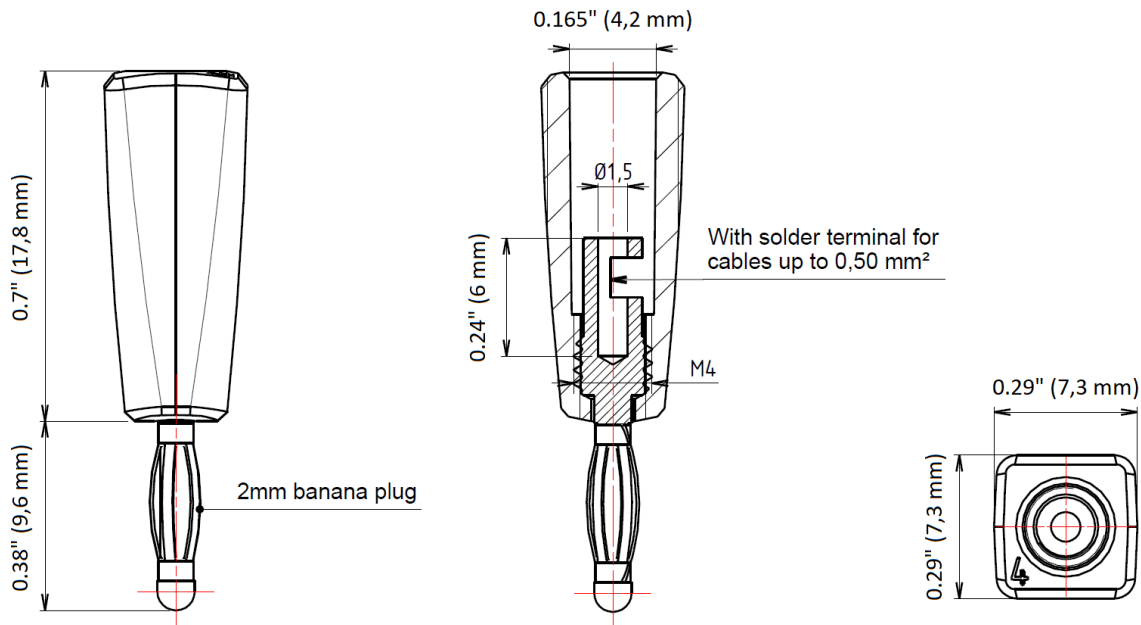

Features

- Threaded two-piece design allows wires to be soldered to the banana plug
- Beryllium Copper spring offers long insertion life
- Compatible with 18 to 22 AWG wire

Material


Banana Plug:
 Body – Brass, Nickel Plated
 Spring – Beryllium Copper, Nickel Plated
 Insulator: Nylon

Ratings

Operating Voltage: 30 VAC / 60 VDC
 Current: 10 A

Ordering Information

Model: 5936-
 * = Color, Standard Colors: -0 Black, -2 Red
 BANANA PLUG, D-I-Y, 2MM,10/PK

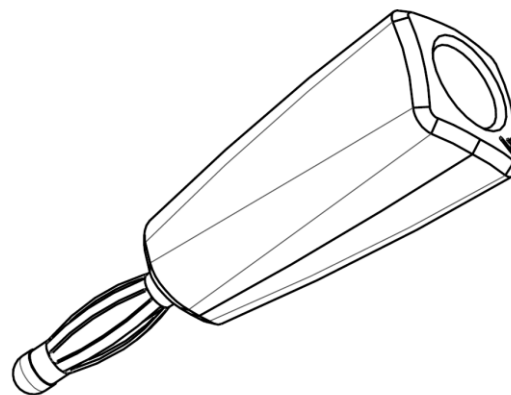

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.